

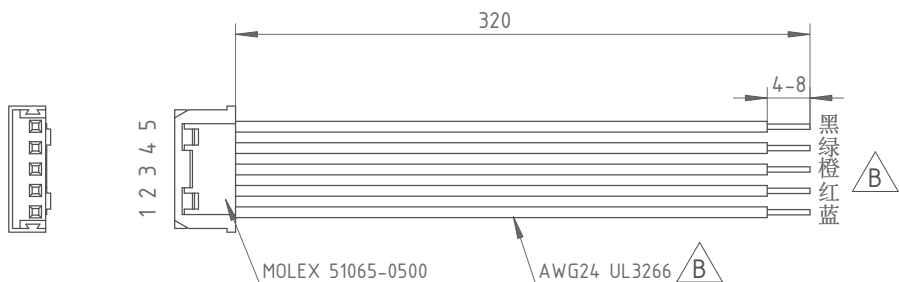


尺寸/Dimensions (Unit:mm)

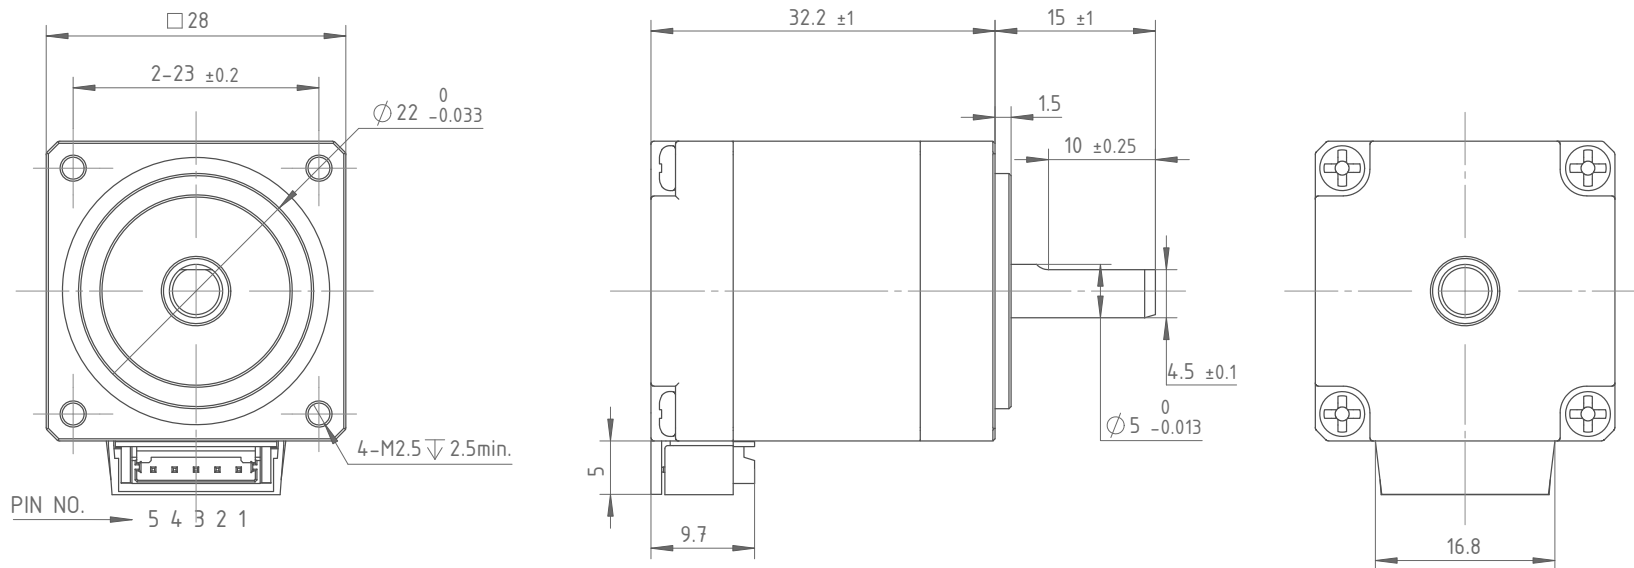

接线图
Wire Diagram

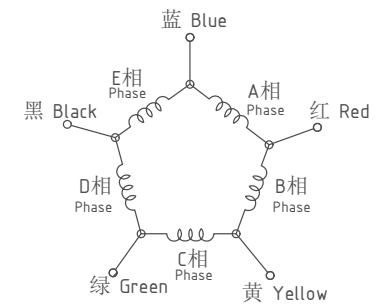

电动机规格/Motor Specification

相数/Number of Phase	5
步距角/Step Angle	0.72°±5%
额定电流/Rated Current	1.2A/Phase
相电阻/Phase Resistance(单相电阻)	0.56Ω±10% (@20°C) .
相电感/Phase Inductance(单相电感)	0.2mH±20% (1Vrms, 1kHz) .
保持力矩/Holding Torque	0.05N·m MIN.
最大自启动频率/Max Starting Pulse Rate	-
绝缘电阻/Insulation Resistance	100MΩ MIN.
绝缘耐压/Dielectric Strength	AC500V 1"
绝缘等级/Insulation Class	Class B (130°C)
温升/Temperature Rise	80K MAX.
转子惯量/Rotor Inertia	9g·cm ²
质量/Mass	0.11kg
寿命/Life	5000 Hours MIN.
使用环境/Operating Environment	-10°C~50°C; 20RH%-90%RH (No condensation)
储存环境/Storage Environment	-20°C~70°C; 15%RH-90%RH (No condensation)

版本记录 REVISION RECORD

混合式步进电动机产品规格书 HYBRID STEPPER MOTOR SPECIFICATION		ST28HD032A-120SF	
表面处理 FINISH	尺寸 SIZE	A3	Nuoju(Taiwan)
材质 MATERIAL	比例 SCALE	2:1	
第一角画法 FIRST ANGLE PROJECTION			CE RoHS COMPLIANT
			SHEET:1/1

